


FAUCET INSTALLATION

Procedure

- Required Tools and Materials. The following tools and materials may be required: Hand drill
 - Appropriate drill bit or hole saw suitable for the countertop material
 - Pipe cutter
 - PTFE (Teflon) tape / thread seal tape
 - Needle-nose pliers
 - Purified water faucet kit
 - PE tubing
- Determine the most suitable location for the faucet on the countertop or sink.
- NOTE: If a suitable pre-existing hole, is available, it may be used to install the faucet.
- Drill a suitable hole using the appropriate hole saw for the countertop or sink material.
- Remove any drilling debris and clean the area around the hole.
- Remove the mounting nut from the faucet stem. Slide the stainless-steel base plate onto the threaded stem with the flat side to the top, removing any protective film if present. Then slide the large rubber washer onto the stem with flat side to the bottom. Insert the faucet stem through the drilled hole in the counter top or sink.
- From underneath the countertop or sink, install the thin rubber washer onto the threaded stem. Secure the faucet assembly by tightening the plastic mounting nut. Ensure that the faucet is firmly secured and does not rotate.
- Cut a suitable length of PE tubing. Connect one end of the tubing to the faucet and the other end to the pure water outlet on the main unit using the appropriate quick-connect fittings.

Version 1

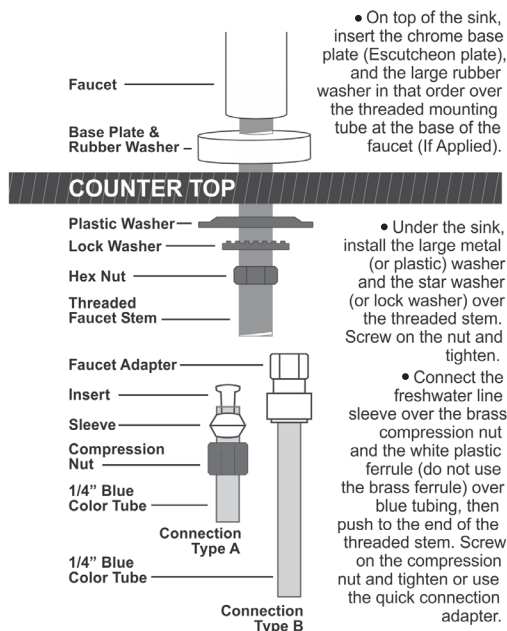

Version 2 - Quick Connect

